

## AB185!K &\$\$!>\*

Full aluminum alloy panel structure with an IP65 waterproof front panel and an aluminum alloy rear cover equipped with heat dissipation holes. It is low power consumption. It is suitable for embedded installation applications and supports various external device connections, making it widely applicable in self-service terminals such as self-service vending machines, inquiry kiosks, parcel lockers, industrial, and medical self-service terminal fields.

### Features

- Ultra-thin bezel design, tailored for embedded installation applications
- Pure flat panel IP65 dust-proof and waterproof.
- Self-developed X86 architecture industrial motherboard
- Intel Celeron J6412 quad-core 2.0GHz processor
- Comply with EMC anti-electromagnetic interference standard
- Compatible with 99% of industry software, With strong expansibility



### Product Model

Product Size	18.5"
Non-touch	AB185-W200
Capacitive touch	AB185-W210
Resistive touch	AB185-W220

### Product Interface



### Product Specifications

#### Screen Parameters

LCD size	18.5" TFT LCD
Resolution	1920×1080(16:9)
Viewing angle	89/89/89/89 (L/R/U/D)
Color	16.7M
Brightness	400 cd/m <sup>2</sup>
Contrast ratio	1000:1


#### Touch Parameters

Touch type	10-point touch projection Capacitive touch screen	Single-point Resistance touch screen	Non-touch
Transmittance	≥88%	≥78%	≥92%
Input mode	Handwriting or Capacitance pen	Fingertip or stylus	/
Controller communication	USB	USB	/

#### Hardware Configuration

CPU	Intel Celeron J6412 quad-core 2.0GHz CPU
Memory	Standard: 8GB LPDDR4 ( It supports up to 16GB)
Storage	Standard: 256GB SSD (optional 512GB SSD, 1T/2T HDD)
Integrated graphics	Intel UHD Graphics 16 EUs
Operating system	WIN10/11, Ubuntu14.04.6/16.04.7/18.04.5/18.04.6/20.04.1/20.04.3/20.04.4/22.04, Centos7.8/8.4/7.9, Redhat7.4, Debian10.0/11.6

### Product Size

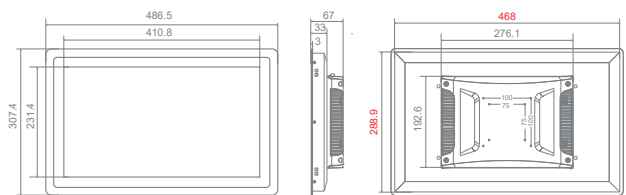

#### Physical Characteristics

Overall dimensions	W486.5X H307.4X D67MM
Size of opening	W470x H290.9MM

#### Interface Parameters

Power interface1	1*12P Phoenix terminal (Power supply/RS232*1/RS485*1/GPIO*5)
Power interface2	1*DC2.5, Supporting 12V-36V power input
USB	2*USB2.0, 2*USB3.0
VGA	1*VGA
HDMI	1*HDMI, Supporting HDMI data output, Up to 4K
SIM	1*SIM, Supporting various formats (Depending on 3G/4G module)
Network interface	2*LAN, 1*Realtek PCI-E NIC RTL8111H (Applicable to 1000Mbps) 1*Realtek PCI-E NIC RT8152B (Applicable to 1000Mbps)
Audio interface	1*Audio I/O, support audio input and output
COM	1*RS232
WiFi antenna	2*WiFi antenna
Grounding post	1*Grounding post (GND)

#### Product Reliability Parameters

Working temperature	-10°C~60°C
Storage temperature	-20°C~70°C
Relative humidity	Humidity: 95% Non-Condensing
Vibration protection	IEC 60068-2-64, Random, 5 ~ 500 Hz, 1 hr/axis
Impact protection	IEC 60068-2-27, Half sine wave, Lasting for 11ms
Product certification	CCC/CE/FCC/EMC/CB/ROHS
Waterproof grade	The front panel reaches IP65 protection level

#### Power Parameters

Power input	DC 12V~36V
Static power	18W

Broad pressure	With wide voltage (12V~36V)
WiFi	Support 2.4GHz/ 5GHz dual-band Wifi
Bluetooth	BT4.0 (Optional)